


8 Channel Relay Panel Module

S791

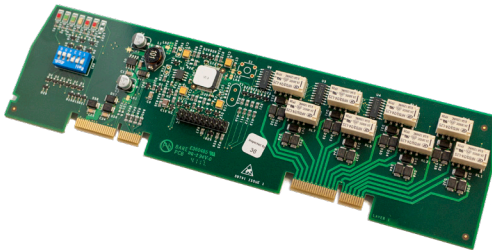

Standard Features

- Simple 'plug-in' connection to the L@titude Fire Alarm Control Panel
- 8 volt free changeover relay contacts (1 Amp 30V DC)
- Relay operated indications
- All outputs programmable for cause and effects
- Decals provided to redesignate terminals

Product Overview

The 8 Channel Relay Panel Module has 8 voltage-free changeover relay contacts, each of which can be individually programmed. All outputs are configurable in the same way as devices connected to the loops and all may be acted upon by cause and effect logic. These boards are typically used in applications which require more than the five standard relay outputs, such as signaling to other systems or plant control.

Technical Specifications

Supply Voltage Range	24V DC
Quiescent Current Consumption	10mA
Maximum Current Consumption	160mA (all relay on)
Output Contact Rating	30 VDC 1 Amp
Dimensions	9¼" x 2½" (234.6mm x 62.8mm)
Cable Capacity	2.5mm per terminal
Operating Temperature	23° F to 104° F (-5° C to 40° C)
Operating Humidity	to 95% (non condensing)

